




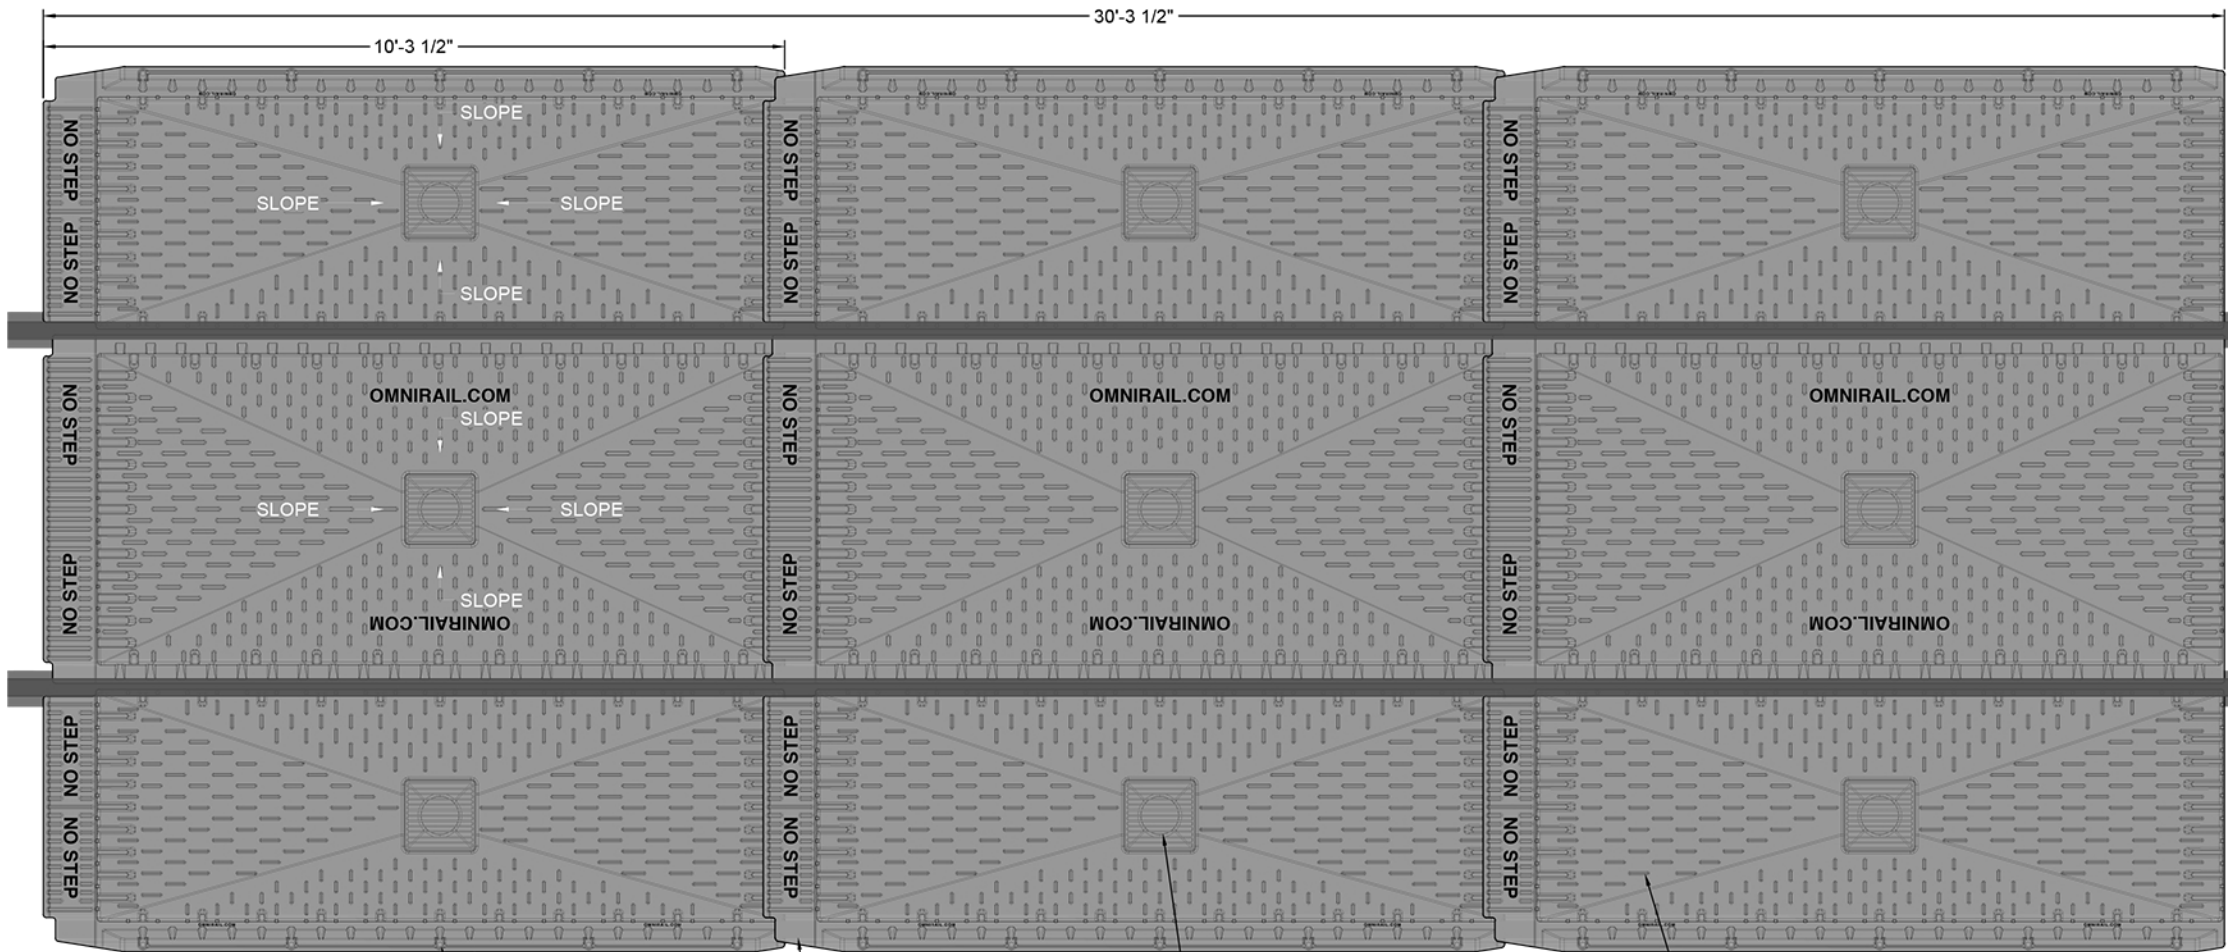


PLAN VIEW
SCALE: 3/8" = 1'-0"

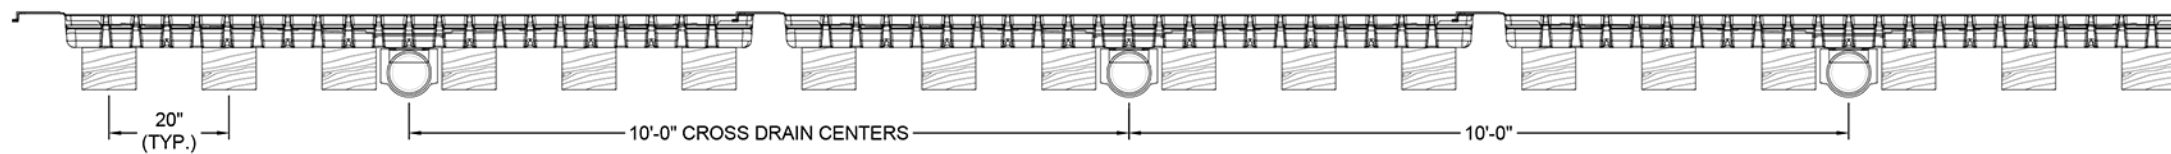

SECTION
SCALE: 3/8" = 1'-0"

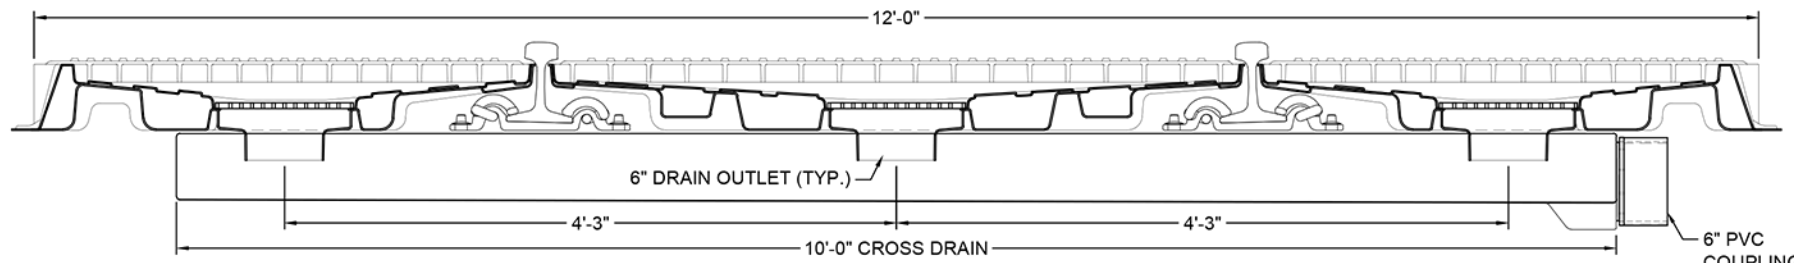

SECTION AT CROSS DRAIN
SCALE: 3/4" = 1'-0"

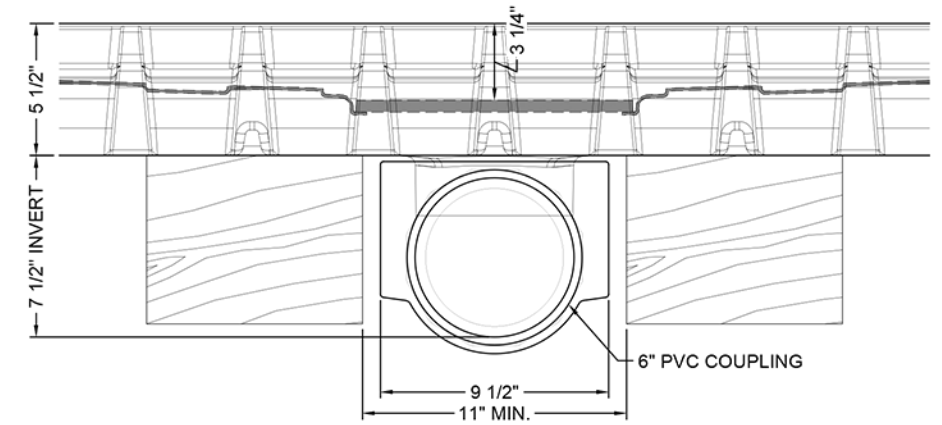

CROSS DRAIN END VIEW
SCALE: 1-1/2" = 1'-0"

TECHNICAL SPECIFICATIONS	
TEMPERATURE RANGE	-100°F TO +200°F
VOLUME CAPACITY	200 GALLONS PER 10' SECTION
WEIGHT	FIELD PAN - 80 LBS GAUGE PAN - 109 LBS CROSS DRAIN - 35 LBS
TENSILE STRENGTH AT YIELD	3,600 PSI
ELONGATION AT BREAK	600%
FLEXURAL MODULUS	165,000 PSI
TENSILE IMPACT	170 FT LBS/IN ²
FLOW RATE AT CROSS DRAIN DISCHARGE	550 GPM

HDPE ENVIROTRAKPAN SYSTEM:

- 12' WIDE BY 10' LONG SECTIONS
- FOR USE WITH 115# TO 136# RAIL
- 10' CROSS DRAIN CENTERS
- 6"Ø DRAIN OUTLET WITH GRATE COVER
- CLOSED DRAIN SYSTEM

HDPE ENVIROTRAKPAN BENEFITS:

- FAST INSTALLATION - LIGHTWEIGHT AND MODULAR
- EASY TO RELOCATE - REMOVE WITHOUT DAMAGE
- CLEAN AND EFFICIENT - RAISED RIBS REDUCE RESIDUE BUILD-UP
- BUILT TOUGH - RESISTS IMPACTS, PUNCTURES, UV, AND EXTREME TEMPS

PATENT PENDING

ADVANCED SPILL CONTAINMENT FOR RAILROADS

HDPE ENVIROTRAKPAN™



THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY DATA OF OMNI PRODUCTS, INC., AND IS NOT FOR DISSEMINATION OR DISCLOSURE, IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUBMITTED, EXCEPT AS AUTHORIZED IN WRITING BY OMNI PRODUCTS, INC. © 2026